

Appendix



10/2	Glossary
10/3	Partner at Siemens
10/4	Online Services
10/4	<u>Information and Ordering Options on the Internet and DVD</u>
10/4	The Future of Manufacturing on the Internet
10/4	Product Selection Using the Interactive CA 01 Automation and Drives Catalog
10/4	Easy Shopping with the Industry Mall
10/5	<u>Information and Download Center, Social Media, Mobile Media</u>
10/5	Downloading Catalogs
10/5	Social and Mobile Media
10/6	Industry Services
10/6	Unleash potential – with services from Siemens
10/6	Increase your performance – with Industry Services
10/7	<u>Industry Services – Portfolio overview</u>
10/7	Plant Data Services
10/7	Training Services
10/7	Support and Consulting Services
10/7	Spare Parts Services
10/8	Repair Services
10/8	Field and Maintenance Services
10/8	Retrofit and Modernization Services
10/8	Service Programs and Agreements
10/9	<u>Online Support</u>
10/9	Online Support App
10/10	Indexes
10/10	Subject index
10/14	Article number index
10/15	Metal surcharges
10/15	<u>Explanation of the raw material/metal surcharges</u>
10/15	Surcharge calculation
10/15	Structure of the metal factor
10/15	Weight method
10/15	Percentage method
10/15	Metal factor examples
10/16	<u>Explanation of the raw material/metal surcharges for dysprosium and neodym (rare earths)</u>
10/16	Surcharge calculation
10/16	Three-month average price
10/16	Structure of the metal factor
10/16	Weight method
10/16	Metal factor examples
10/17	<u>Values of the metal factor</u>
10/18	Conditions of sale and delivery
10/18	General Provisions
10/18	Prices
10/18	Additional Terms and Conditions
10/18	Export regulations

Appendix



Glossary


Overview

Characteristic values

Formula symbol/ Short designation	Unit	Designation
i	–	Gear ratio
R_{ex}	–	Ratio, number of teeth (exact gear ratio represented as fraction)
M_{2rated}	Nm	Rated torque of the gearbox at the $n_1 = 1450$ rpm (range of fatigue strength of Wöhler curve)
M_{2max}	Nm	The maximum permissible output torque of the gearbox that can be sustained at n_{1max} for brief periods ^{*)} (range of endurance limit of Wöhler curve)
M_{1max}	Nm	The maximum permissible input torque of the gearbox that can be sustained for brief periods ^{*)} : $M_{1max} = M_{2max} / (i \cdot \eta_G)$
M_{2dyn}	Nm	The maximum permissible output torque of the geared motor that can be sustained for brief periods ^{*)} . The following generally applies $M_{2dyn} = M_{max} \cdot i \cdot \eta_G$; where $M_{2dyn} < M_{2max}$. For the servo geared motors printed in bold in the servo geared motor selection tables, M_{2dyn} is limited to the maximum permissible torque in short-time duty M_{2max} as the motor could otherwise overload the gearbox. The motor current I_{max} must be limited during commissioning.
M_{max}	Nm	Maximum possible torque of servomotor. In order to protect the gearbox against damage, the following generally applies: $M_{max} < M_{1max}$
I_{max}	A	Motor current at M_{max}
$M_{2Em.Off}$	Nm	The emergency off torque is limited to 1000 cycles.
n_{1max}	rpm	Maximum permissible speed at gearbox input for brief periods ^{*)}
n_{2max}	rpm	Maximum permissible output speed for brief periods ^{*)} ($= n_{1max} / i$)
n_{1rated}	rpm	Rated motor speed (not rated speed of gearbox!)
n_1	rpm	Speed at gearbox input
η_G	–	Gearbox efficiency
η_M	–	Motor efficiency
φ	°	Torsional backlash in minutes of the angle (applies only to reduced-backlash gearboxes)
F_{R2}	N	Maximum permissible cantilever force in continuous operation
F_{R2max}	N	Maximum permissible cantilever force at M_{2max}
c_T	Nm/°	Torsional stiffness
J_G	kgm ²	Gearbox moment of inertia
SH	–	Motor shaft height
CT	–	Motor version Compact
HD	–	Motor version High Dynamic
P_{rated}	kW	Rated motor power
M_{rated}	Nm	Rated motor torque at n_{1rated}
I_{rated}	A	Rated current
U_{rated}	V	Rated voltage
M_0	Nm	Static torque
I_0	A	Stall current
J_{mot}	kgm ²	Rotor moment of inertia of motor
$J_{Mot Br}$	kgm ²	Rotor moment of inertia of motor with holding brake
M_{1Br}	Nm	Dynamic braking torque Lowest averaged dynamic braking torque that can occur in emergency stop operation
M_{2Br}	Nm	Rated braking torque of the brake (dynamic) in accordance with DIN VDE 0580 Averaged value of at least 3 measurements of the maximum occurring switching torque
M_{4Br}	Nm	Holding torque of the brake Permissible torque for closed brake in steady-state operation without slip
W	J	Maximum switched energy per brake operation – switched energy for up to 2000 brake operations from a speed of 3000 rpm. Calculation: $W [J] = J [kgm^2] \times n^2 [rpm] / 182.4$

^{*)} For brief periods:

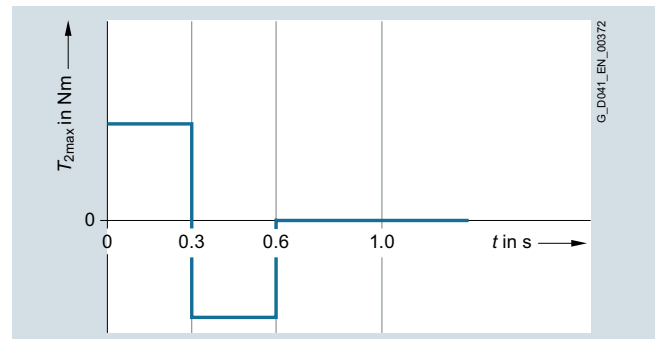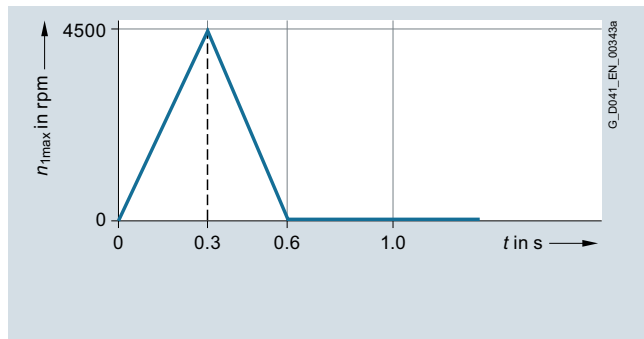

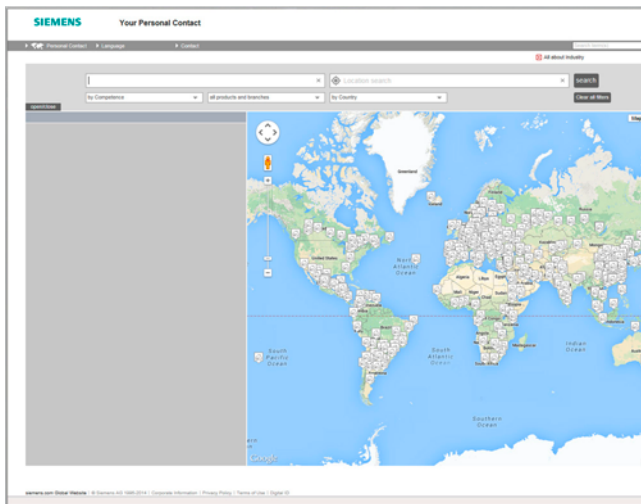

At Siemens we are resolutely pursuing the same goal: long-term improvement of your competitive ability.

We are committed to this goal. Thanks to our commitment, we continue to set new standards in automation and drive technology. In all industries – worldwide.

At your service locally, around the globe for consulting, sales, training, service, support, spare parts ... on the entire Industry Automation and Drive Technologies range.



Your personal contact can be found in our Contacts Database at: www.siemens.com/automation-contact

You start by selecting

- the required competence,
- products and branches,
- a country,
- a city

or by a

- location search or
- person search.

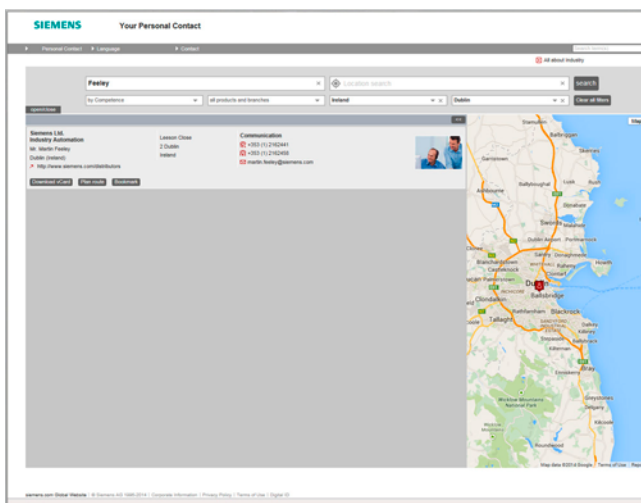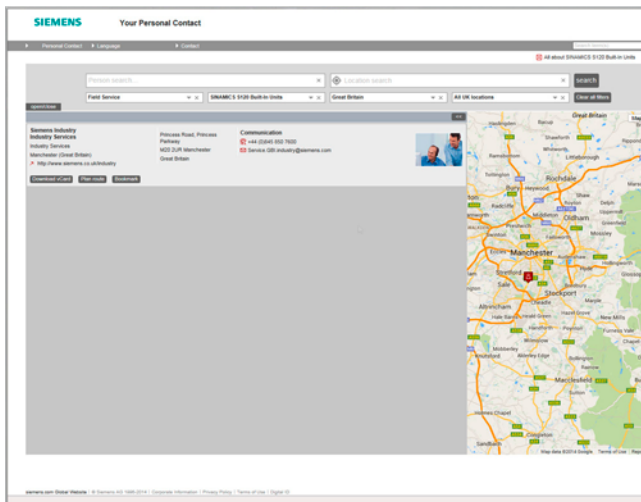

Appendix

Online Services

Information and Ordering Options on the Internet and DVD

The Future of Manufacturing on the Internet




Detailed knowledge of the range of products and services available is essential when planning and engineering automation systems. It goes without saying that this information must always be as up-to-date as possible.

Industry is on the threshold of the fourth industrial revolution as digitization now follows after the automation of production. The goals are to increase productivity and efficiency, speed, and quality. In this way, companies can remain competitive on the path to the future of industry.

You will find everything you need to know about products, systems and services on the internet at:

www.siemens.com/industry

Product Selection Using the Interactive CA 01 Automation and Drives Catalog

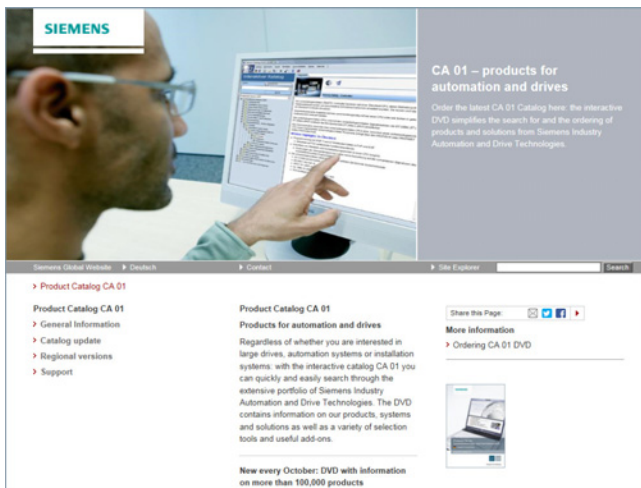

Detailed information together with user-friendly interactive functions:

The CA 01 interactive catalog covers more than 100,000 products, thus providing a comprehensive overview of the product range provided by Siemens.

You will find everything you need here for solving tasks in the fields of automation, switching, installation and drives. All information is provided over a user interface that is both user-friendly and intuitive.

You can order the CA 01 product catalog from your Siemens sales contact or in the Information and Download Center:


www.siemens.com/industry/infocenter

Information about the CA 01 interactive catalog can be found on the Internet at:

www.siemens.com/automation/ca01

or on DVD.

Easy Shopping with the Industry Mall

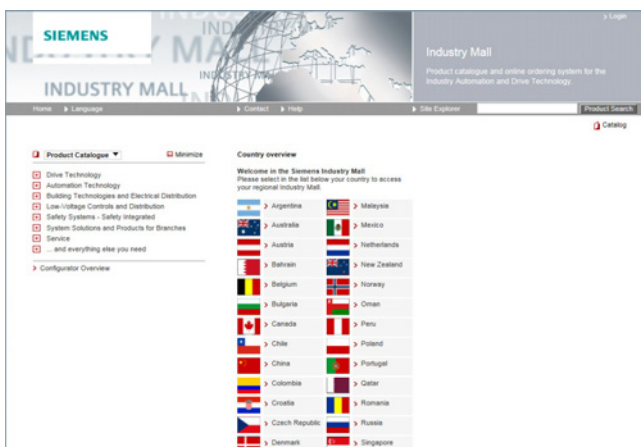

The Industry Mall is the electronic ordering platform of Siemens AG on the Internet. Here you have online access to a huge range of products presented in an informative and attractive way.


Data transfer via EDIFACT allows the whole procedure, from selection through ordering to tracking and tracing, to be carried out online. Availability checks, customer-specific discounts and bid creation are also possible.

Numerous additional functions are provided for your support. For example, powerful search functions make it easy to select the required products. Configurators enable you to configure complex product and system components quickly and easily. CAx data types are also provided here.

You can find the Industry Mall on the Internet at:

www.siemens.com/industrymall

Downloading Catalogs

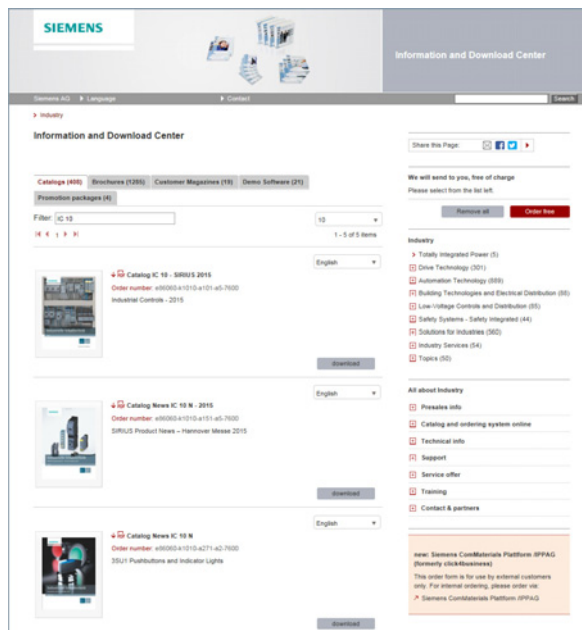


In addition to numerous other useful documents, you can also find the catalogs listed on the back inside cover of this catalog in the Information and Download Center. You can download these catalogs in PDF format without having to register.

The filter dialog above the first catalog displayed makes it possible to carry out targeted searches. If you enter "MD 3" for example, you will find both the MD 30.1 and MD 31.1 catalogs. If you enter "IC 10", both the IC 10 catalog and the associated news or add-ons are displayed.

Visit us at:

www.siemens.com/industry/infocenter

Social and Mobile Media

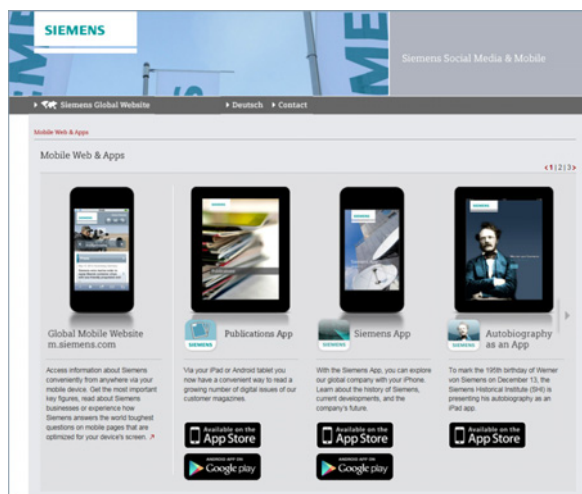

Connect with Siemens through social media: visit our social networking sites for a wealth of useful information, demos on products and services, the opportunity to provide feedback, to exchange information and ideas with customers and other Siemens employees, and much, much more. Stay in the know and follow us on the ever-expanding global network of social media.

To find out more about Siemens' current social media activities, visit us at:

www.siemens.com/socialmedia

Or via our product pages at:

www.siemens.com/automation or www.siemens.com/drives

Connect with Siemens Industry at our central access point to read all the news on the future of manufacturing, watch current videos and inform yourself about all the latest industry developments:

www.siemens.com/future-of-manufacturing



Discover the world of Siemens.

We are also constantly expanding our offering of cross-platform apps for smartphones and tablets. You will find the current Siemens apps at the App Store (iOS) or at Google Play (Android):

<https://itunes.apple.com/en/app/siemens/id452698392?mt=8>

<https://play.google.com/store/search?q=siemens>


The Siemens app, for example, tells you all about the history, latest developments and future plans of the company – with informative pictures, fascinating reports and the most recent press releases.

Appendix

Industry Services

Overview

Unleash potential – with services from Siemens

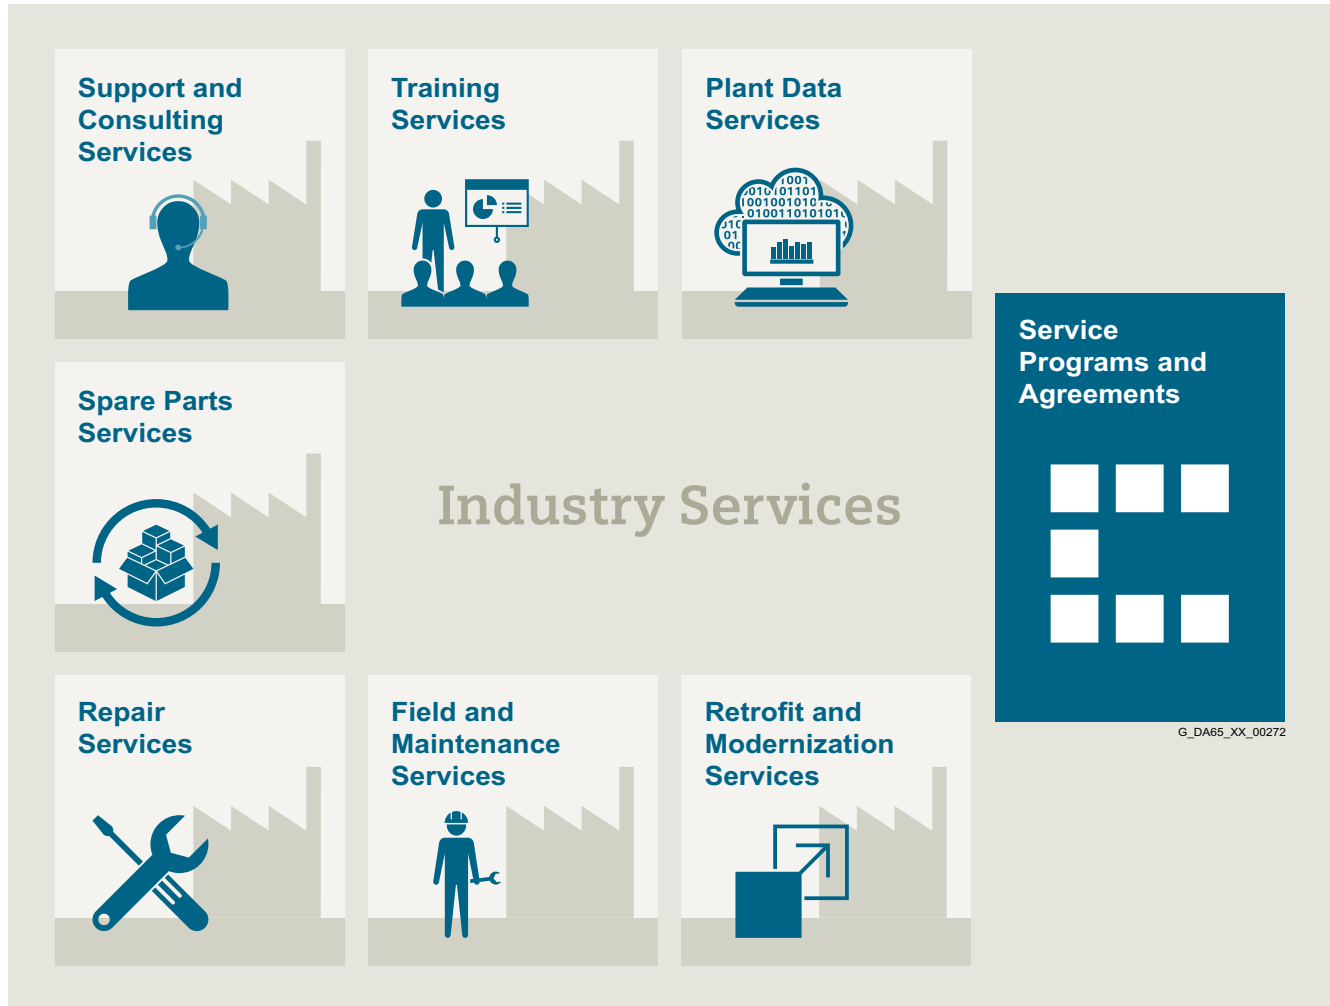

Increase your performance – with Industry Services

Optimizing the productivity of your equipment and operations can be a challenge, especially with constantly changing market conditions. Working with our service experts makes it easier. We understand your industry's unique processes and provide the services needed so that you can better achieve your business goals.

You can count on us to maximize your uptime and minimize your downtime, increasing your operations' productivity and reliability. When your operations have to be changed quickly to meet a new demand or business opportunity, our services give you the flexibility to adapt. Of course, we take care that your production is protected against cyber threats. We assist in keeping your operations as energy and resource efficient as possible and reducing your total cost of ownership. As a trendsetter, we ensure that you can capitalize on the opportunities of digitalization and by applying data analytics to enhance decision making: You can be sure that your plant reaches its full potential and retains this over the longer lifespan.

You can rely on our highly dedicated team of engineers, technicians and specialists to deliver the services you need – safely, professionally and in compliance with all regulations. We are there for you, where you need us, when you need us.

Overview
Plant Data Services


Make your industrial processes transparent to gain improvements in productivity, asset availability, and energy efficiency.

Production data is generated, filtered and translated with intelligent analytics to enhance decision-making.

This is done whilst taking data security into consideration and with continuous protection against cyber attack threats.

www.industry.siemens.com/services/global/en/portfolio/plant-data-services/Pages/index.aspx

Support and Consulting Services


Industry Online Support site for comprehensive information, application examples, FAQs and support requests.

Technical and Engineering Support for advice and answers for all inquiries about functionality, handling, and fault clearance.

Information & Consulting Services, e.g. SIMATIC System Audit; clarity about the state and service capability of your automation system or Lifecycle Information Services; transparency on the lifecycle of the products in your plants.

www.industry.siemens.com/services/global/en/portfolio/support-consulting/Pages/index.aspx

Training Services


From the basics and advanced to specialist skills, SITRAIN courses provide expertise right from the manufacturer – and encompass the entire spectrum of Siemens products and systems for the industry.

Worldwide, SITRAIN courses are available wherever you need a training course in more than 170 locations in over 60 countries.

www.industry.siemens.com/services/global/en/portfolio/training/Pages/index.aspx

Spare Parts Services


Are available worldwide for smooth and fast supply of spare parts – and thus optimal plant availability. Genuine spare parts are available for up to ten years. Logistic experts take care of procurement, transport, custom clearance, storage and order management. Reliable logistics processes ensure that components reach their destination as needed.

Asset optimization services help you design a strategy for parts supply where your investment and carrying costs are reduced and the risk of obsolescence is avoided.

www.industry.siemens.com/services/global/en/portfolio/spare_parts/Pages/index.aspx

Appendix

Industry Services

Industry Services – Portfolio overview

Overview (continued)

Repair Services



Are offered on-site and in regional repair centers for fast restoration of faulty devices' functionality.

Also available are extended repair services, which include additional diagnostic and repair measures, as well as emergency services.

www.industry.siemens.com/services/global/en/portfolio/repair_services/Pages/index.aspx

Retrofit and Modernization Services



Provide a cost-effective solution for the expansion of entire plants, optimization of systems or upgrading existing products to the latest technology and software, e.g. migration services for automation systems.

Service experts support projects from planning through commissioning and, if desired over the entire extended lifespan, e.g. Retrofit for Integrated Drive Systems for an extended lifetime of your machines and plants

www.industry.siemens.com/services/global/en/portfolio/retrofit-modernization/Pages/index.aspx

Field and Maintenance Services



Siemens specialists are available globally to provide expert field and maintenance services, including commissioning, functional testing, preventive maintenance and fault clearance. All services can be included in customized service agreements with defined reaction times or fixed maintenance intervals.

www.industry.siemens.com/services/global/en/portfolio/field_service/Pages/index.aspx

Service Programs and Agreements



A technical Service Program or Agreement enables you to easily bundle a wide range of services into a single annual or multi-year agreement.

You pick the services you need to match your unique requirements or fill gaps in your organization's maintenance capabilities.

Programs and agreements can be customized as KPI-based and/or performance-based contracts.


www.industry.siemens.com/services/global/en/portfolio/service_programs/Pages/index.aspx

Overview



Online Support is a comprehensive information system for all questions relating to products, systems, and solutions that Siemens has developed for industry over time. With more than 300,000 documents, examples and tools, it offers users of automation and drive technology a way to quickly find up-to-date information. The 24-hour service enables direct, central access to detailed product information as well as numerous solution examples for programming, configuration and application.

Online Support App



Using the Online Support app, you can access over 300,000 documents covering all Siemens industrial products – anywhere, any time. Regardless of whether you need help implementing your project, fault-finding, expanding your system or are planning a new machine.

You have access to FAQs, manuals, certificates, characteristic curves, application examples, product notices (e.g. announcements of new products) and information on successor products in the event that a product is discontinued.

Just scan the product code printed on the product directly using the camera of your mobile device to immediately see all technical information available on this product at a glance. The graphical CAx information (3D model, circuit diagrams or EPLAN macros) is also displayed. You can forward this information to your workplace using the e-mail function.

The search function retrieves product information and articles and supports you with a personalized suggestion list. You can find your favorite pages – articles you need frequently – under “mySupport”. You also receive selected news on new functions, important articles or events in the News section.

The content, in six languages, is increasingly multimedia-based – and now also available as a mobile app. Online support’s “Technical Forum” offers users the opportunity to share information with each other. The “Support Request” option can be used to contact Siemens’ technical support experts. The latest content, software updates, and news via newsletters and Twitter ensure that industry users are always up to date.

www.siemens.com/industry/onlineSupport

Scan the QR code
for information on
our Online Support
app.



The app is available free of charge from the Apple App Store (iOS) or from Google Play (Android).

<https://support.industry.siemens.com/cs/ww/en/sc/2067>

Appendix

Indexes

Subject index

A		
Additional conditions	10/18	
Additional factor C for the transmission element type	2/6	
Ambient temperature	2/10	
Ambient temperature and installation altitude	2/4	
Angled mounting position	8/36	
Appendix	10/1	
Article No., structure	1/13	
Article No. supplements	8/2	
Article number code	1/13	
Article No. index	10/15	
Axial force, permissible	2/7	
B		
Benefits	1/5	
C		
Checklist	2/3	
Chemical resistance	2/20, 8/45	
Colors	8/45	
Components of the SIMOLOC assembly system	2/15	
Commissioning SINAMICS S120 in the TIA Portal	9/8	
Conditions of sale and delivery/export regulations	10/18	
Configuring	1/12	
Configuring guide	2/1	
Configuring procedure	2/2	
Configuring with the SIZER for Siemens Drives engineering tool	2/4	
Converter types	2/4	
Cooling	2/10	
Customer data on the rating plate	8/45	
D		
Definition of the point of application of radial and axial forces	2/7	
Degrees of protection	2/13	
Degrees of protection for AC motors	1/19	
Design	1/6	
Design of servo bevel geared motors	1/8	
Design of servo helical geared motors	1/6	
Design of servo helical worm geared motors	1/10	
Design of servo parallel shaft geared motors	1/7	
Determining the drive data	2/2	
Dimensioning methods	2/4	
Dimensions of servo bevel geared motors	5/66	
- Flange-mounted design 2-stage – B.F.29	5/68	
- Foot-mounted design 2-stage – B.29	5/66	
- Gearbox size 29	5/66	
- Housing flange design 2-stage – B.Z.29	5/70	
- Shaft-mounted design 2-stage – BAD.29	5/72	
• Gearbox size 39	5/74, 5/90	
- Flange-mounted design 2-stage – B.F.39	5/76	
- Flange-mounted design 3-stage – K.F.39	5/92	
- Foot-mounted design 2-stage – B.39	5/74	
- Foot-mounted design 3-stage – K.39	5/90	
- Housing flange design 2-stage – B.Z.39	5/78	
- Housing flange design 3-stage – K.Z.39	5/94	
- Shaft-mounted design 2-stage – BAD.39	5/80	
- Shaft-mounted design 3-stage – KAD.39	5/96	
• Gearbox size 49	5/82, 5/98	
- Flange-mounted design 2-stage – B.F.49	5/84	
- Flange-mounted design 3-stage – K.F.49	5/100	
- Foot-mounted design 2-stage – B.49	5/82	
- Foot-mounted design 3-stage – K.49	5/98	
- Housing flange design 2-stage – B.Z.49	5/86	
- Housing flange design 3-stage – K.Z.49	5/102	
- Shaft-mounted design 2-stage – BAD.49	5/88	
- Shaft-mounted design 3-stage – KAD.49	5/104	
• Gearbox size 69	5/106	
- Flange-mounted design 3-stage – K.F.69	5/108	
- Foot-mounted design 3-stage – K.69	5/106	
- Housing flange design 3-stage – K.Z.69	5/110	
- Shaft-mounted design 3-stage – KAD.69	5/112	
• Gearbox size 79	5/114	
- Flange-mounted design 3-stage – K.F.79	5/116	
- Foot-mounted design 3-stage – K.79	5/114	
- Housing flange design 3-stage – K.Z.79	5/118	
- Shaft-mounted design 3-stage – KAD.79	5/120	
• Gearbox size 89	5/122	
- Flange-mounted design 3-stage – K.F.89	5/124	
- Foot-mounted design 3-stage – K.89	5/122	
- Housing flange design 3-stage – K.Z.89	5/126	
- Shaft-mounted design 3-stage – KAD.89	5/128	
• Gearbox size 109	5/130	
- Flange-mounted design 3-stage – K.F.109	5/132	
- Foot-mounted design 3-stage – K.109	5/130	
- Housing flange design 3-stage – K.Z.109	5/134	
- Shaft-mounted design 3-stage – KAD.109	5/136	
• Gearbox size 129	5/138	
- Flange-mounted design 3-stage – K.F.129	5/140	
- Foot-mounted design 3-stage – K.129	5/138	
- Housing flange design 3-stage – K.Z.129	5/142	
- Shaft-mounted design 3-stage – KAD.129	5/144	
• Gearbox size 149	5/146	
- Flange-mounted design 3-stage – K.F.149	5/148	
- Foot-mounted design 3-stage – K.149	5/146	
- Housing flange design 3-stage – K.Z.149	5/150	
- Shaft-mounted design 3-stage – KAD.149	5/152	
• Inside contour and dimensions of the flange-mounted design	5/158	
• Pin holes	5/160	
• Protection cover for hollow shaft	5/156	
• Protection cover for hollow shaft with SIMOLOC assembly system	5/157	
• Protection cover for hollow shaft and hollow shaft with shrink disk	5/156	
• SIMOLOC assembly system for shaft-mounted design 2-stage and 3-stage	5/154	
Dimensions of servo helical geared motors	3/84	
• Gearbox size 29	3/84	
- Flange-mounted design 2-stage and 3-stage – ZF29 and DF29	3/88	
- Foot/flange-mounted design 2-stage and 3-stage – ZB29 and DB29	3/86	
- Foot-mounted design 2-stage and 3-stage – Z29 and D29	3/84	
- Housing flange design 2-stage and 3-stage – ZZ29 and DZ29	3/90	
• Gearbox size 39	3/92	
- Flange-mounted design 2-stage and 3-stage – ZF39 and DF39	3/96	
- Foot/flange-mounted design 2-stage and 3-stage – ZB39 and DB39	3/94	
- Foot-mounted design 2-stage and 3-stage – Z39 and D39	3/92	
- Housing flange design 2-stage and 3-stage – ZZ39 and DZ39	3/98	
• Gearbox size 49	3/100	
- Flange-mounted design 2-stage and 3-stage – ZF49 and DF49	3/102	
- Foot-mounted design and foot/flange-mounted design 2-stage and 3-stage – Z49, D49, ZB49 and DB49	3/100	
- Housing flange design 2-stage and 3-stage – ZZ49 and DZ49	3/104	
• Gearbox size 59	3/106	
- Flange-mounted design 2-stage and 3-stage – ZF59 and DF59	3/108	
- Foot-mounted design and foot/flange-mounted design 2-stage and 3-stage – Z59, D59, ZB59	3/106	
- Housing flange design 2-stage and 3-stage – ZZ59 and DZ59	3/110	
• Gearbox size 69	3/112	
- Flange-mounted design 2-stage and 3-stage – ZF69 and DF69	3/114	
- Foot-mounted design and foot/flange-mounted design 2-stage and 3-stage – Z69, D69, ZB69	3/112	
- Housing flange design 2-stage and 3-stage – ZZ69 and DZ69	3/116	
• Gearbox size 79	3/118	
- Flange-mounted design 2-stage and 3-stage – ZF79 and DF79	3/120	
- Foot-mounted design and foot/flange-mounted design 2-stage and 3-stage – Z79, D79, ZB79	3/118	
- Housing flange design 2-stage and 3-stage – ZZ79 and DZ79	3/122	
• Gearbox size 89	3/124	
- Flange-mounted design 2-stage and 3-stage – ZF89 and DF89	3/126	
- Foot-mounted design and foot/flange-mounted design 2-stage and 3-stage – Z89, D89, ZB89	3/124	
- Housing flange design 2-stage and 3-stage – ZZ89 and DZ89	3/128	
• Gearbox size 109	3/130	
- Flange-mounted design 2-stage and 3-stage – ZF109 and DF109	3/132	
- Foot-mounted design 2-stage and 3-stage – Z109, D109, ZB109 and DB109	3/130	
- Housing flange design 2-stage and 3-stage – ZZ109 and DZ109	3/134	

- Gearbox size 129 3/136
 - Flange-mounted design 2-stage and 3-stage – ZF.129 and DF.129 3/138
 - Foot-mounted design 2-stage and 3-stage – Z.129, D.129, ZB.129 and DB.129 3/136
 - Housing flange design 2-stage and 3-stage – ZZ.129 and DZ.129 3/140
- Inside contour and dimensions of the flange-mounted design 3/142
- Dimensions of servo helical worm geared motors 6/28
- Gearbox size 29 6/28
 - Flange-mounted design 2-stage – C.F.29 6/30
 - Foot-mounted design 2-stage – C..29 6/28
 - Housing flange design 2-stage – C.Z.29 6/32
 - Shaft-mounted design 2-stage – CAD.29 6/34
- Gearbox size 39 6/36
 - Flange-mounted design 2-stage – C.F.39 6/38
 - Foot-mounted design 2-stage – C..39 6/36
 - Housing flange design 2-stage – C.Z.39 6/40
 - Shaft-mounted design 2-stage – CAD.39 6/42
- Gearbox size 49 6/44
 - Flange-mounted design 2-stage – C.F.49 6/46
 - Foot-mounted design 2-stage – C..49 6/44
 - Housing flange design 2-stage – C.Z.49 6/48
 - Shaft-mounted design 2-stage – CAD.49 6/50
- Gearbox size 69 6/52
 - Flange-mounted design 2-stage – C.F.69 6/54
 - Foot-mounted design 2-stage – C..69 6/52
 - Housing flange design 2-stage – C.Z.69 6/56
 - Shaft-mounted design 2-stage – CAD.69 6/58
- Gearbox size 89 6/60
 - Flange-mounted design 2-stage – C.F.89 6/62
 - Foot-mounted design 2-stage – C..89 6/60
 - Housing flange design 2-stage – C.Z.89 6/64
 - Shaft-mounted design 2-stage – CAD.89 6/66
- Inside contour and dimensions of the flange-mounted design 6/72
- Protection cover for hollow shaft 6/70
- Protection cover for hollow shaft with SIMOLOC assembly system 6/71
- Protection cover for hollow shaft and hollow shaft with shrink disk for gearbox types CAS, CAFS, CAZS and CADS 6/70
- SIMOLOC assembly system for shaft-mounted design 2-stage 6/68
- Dimensions of servo parallel shaft geared motors 4/78
- Gearbox size 29 4/78
 - Flange-mounted design 2-stage and 3-stage – FZ.F.29 and FD.F.29 4/82
 - Foot-mounted design 2-stage and 3-stage – FZ..29 and FD..29 4/84
 - Housing flange design 2-stage and 3-stage – FZ.Z.29 and FD.Z.29 4/80
 - Shaft-mounted design 2-stage and 3-stage – FZAD.29 and FDAD.29 4/78
- Gearbox size 39 4/86
 - Flange-mounted design 2-stage and 3-stage – FZ.F.39 and FD.F.39 4/90
 - Foot-mounted design 2-stage and 3-stage – FZ..39 and FD..39 4/92
 - Housing flange design 2-stage and 3-stage – FZ.Z.39 and FD.Z.39 4/88
 - Shaft-mounted design 2-stage and 3-stage – FZAD.39 and FDAD.39 4/86
- Gearbox size 49 4/94
 - Flange-mounted design 2-stage and 3-stage – FZ.F.49 and FD.F.49 4/98
 - Foot-mounted design 2-stage and 3-stage – FZ..49 and FD..49 4/100
 - Housing flange design 2-stage and 3-stage – FZ.Z.49 and FD.Z.49 4/96
 - Shaft-mounted design 2-stage and 3-stage – FZAD.49 and FDAD.49 4/94
- Gearbox size 69 4/102
 - Flange-mounted design 2-stage and 3-stage – FZ.F.69 and FD.F.69 4/106
 - Foot-mounted design 2-stage and 3-stage – FZ..69 and FD..69 4/108
 - Housing flange design 2-stage and 3-stage – FZ.Z.69 and FD.Z.69 4/104
 - Shaft-mounted design 2-stage and 3-stage – FZAD.69 and FDAD.69 4/102
- Gearbox size 79 4/110
 - Flange-mounted design 2-stage and 3-stage – FZ.F.79 and FD.F.79 4/114
 - Foot-mounted design 2-stage and 3-stage – FZ..79 and FD..79 4/116
 - Housing flange design 2-stage and 3-stage – FZ.Z.79 and FD.Z.79 4/112
 - Shaft-mounted design 2-stage and 3-stage – FZAD.79 and FDAD.79 4/110
- Gearbox size 89 4/118
 - Flange-mounted design 2-stage and 3-stage – FZ.F.89 and FD.F.89 4/122
 - Foot-mounted design 2-stage and 3-stage – FZ..89 and FD..89 4/124
 - Housing flange design 2-stage and 3-stage – FZ.Z.89 and FD.Z.89 4/120
 - Shaft-mounted design 2-stage and 3-stage – FZAD.89 and FDAD.89 4/118
- Gearbox size 109 4/126
 - Flange-mounted design 2-stage and 3-stage – FZ.F.109 and FD.F.109 4/130
 - Foot-mounted design 2-stage and 3-stage – FZ..109 and FD..109 4/132
 - Housing flange design 2-stage and 3-stage – FZ.Z.109 and FD.Z.109 4/128
 - Shaft-mounted design 2-stage and 3-stage – FZAD.109 and FDAD.109 4/126
- Gearbox size 129 4/134
 - Flange-mounted design 2-stage and 3-stage – FZ.F.129 and FD.F.129 4/138
 - Foot-mounted design 2-stage and 3-stage – FZ..129 and FD..129 4/140
 - Housing flange design 2-stage and 3-stage – FZ.Z.129 and FD.Z.129 4/136
 - Shaft-mounted design 2-stage and 3-stage – FZAD.129 and FDAD.129 4/134
- Inside contour and dimensions of the flange-mounted design 4/146
- Pin holes 4/148
- Protection cover for hollow shaft 4/144
- Protection cover for hollow shaft and hollow shaft with shrink disk 4/144
- Protection cover for hollow shaft with SIMOLOC assembly system 4/145
- SIMOLOC assembly system for shaft-mounted design 2-stage and 3-stage 4/142
- Drive data, determining 2/2
- Drive ES Engineering Software 9/10
- Drive Technology Configurator (DT Configurator) 9/3
- Downloading catalogs 10/5
- E**
- Easy shopping with the Industry Mall 10/4
- Efficiency optimization 2/5
- Encoders 2/10
- Encoder systems 7/3
- Engineering tools 9/1
- Enhance performance – using Industry Services 10/6
- Example of how to compile an Article No. correctly 1/14
- Existing radial force 2/6
- Explanation of the raw material/metal surcharges 10/15
- Explanation of the raw material/metal surcharges for dysprosium and neodymium (rare earths) 10/16
- Export regulations 10/18
- F**
- Field and Maintenance Services 10/8
- Flanges 1/18
- Flange-mounted designs 8/40
- G**
- Gearboxes 2/5
- Gearbox efficiency 2/5
- Gearbox as speed and torque converter 2/5
- Gearbox size 29 3/3, 4/3, 5/3, 6/3
 - 2-stage – 1FG1102 – Z29 3/3
 - 2-stage – 1FG1301 – FZ29 4/3
 - 2-stage – 1FG1501 – B29 5/3
 - 2-stage – 1FG1601 – C29 6/3
 - 3-stage – 1FG1202 – D29 3/8
 - 3-stage – 1FG1401 – FD29 4/9
- Gearbox size 39 3/12, 4/13, 5/9, 5/20, 6/8
 - 2-stage – 1FG1103 – Z39 3/12
 - 2-stage – 1FG1302 – FZ39 4/13
 - 2-stage – 1FG1502 – B39 5/9
 - 2-stage – 1FG1602 – C39 6/8
 - 3-stage – 1FG1203 – D39 3/17
 - 3-stage – 1FG1402 – FD39 4/19
 - 3-stage – 1FG1504 – K39 5/20

Appendix

Indexes

Subject index

Gearbox size 49	4/22, 4/24, 5/14, 5/26, 6/13
• 2-stage – 1FG1104 – Z49	3/22
• 2-stage – 1FG1303 – FZ49	4/24
• 2-stage – 1FG1503 – B49	5/14
• 2-stage – 1FG1603 – C49	6/13
• 3-stage – 1FG1204 – D49	3/28
• 3-stage – 1FG1403 – FD49	4/29
• 3-stage – 1FG1505 – K49	5/26
Gearbox size 59	3/33
• 2-stage – 1FG1105 – Z59	3/33
• 3-stage – 1FG1205 – D59	3/38
Gearbox size 69	3/43, 4/34, 5/32, 6/18
• 2-stage – 1FG1106 – Z69	3/43
• 2-stage – 1FG1304 – FZ69	4/34
• 2-stage – 1FG1604 – C69	6/18
• 3-stage – 1FG1206 – D69	3/48
• 3-stage – 1FG1404 – FD69	4/39
• 3-stage – 1FG1507 – K69	5/32
Gearbox size 79	3/53, 4/44, 5/38
• 2-stage – 1FG1107 – Z79	3/53
• 2-stage – 1FG1305 – FZ79	4/44
• 3-stage – 1FG1207 – D79	3/57
• 3-stage – 1FG1405 – FD79	4/48
• 3-stage – 1FG1508 – K79	5/38
Gearbox size 89	3/61, 4/52, 5/44, 6/23
• 2-stage – 1FG1108 – Z89	3/61
• 2-stage – 1FG1306 – FZ89	4/52
• 2-stage – 1FG1605 – C89	6/23
• 3-stage – 1FG1208 – D89	3/65
• 3-stage – 1FG1406 – FD89	4/57
• 3-stage – 1FG1510 – K89	5/44
Gearbox size 109	3/69, 4/61, 5/50
• 3-stage – 1FG1511 – K109	5/50
• 2-stage – 1FG1110 – Z109	3/69
• 2-stage – 1FG1307 – FZ109	4/61
• 3-stage – 1FG1210 – D109	3/73
• 3-stage – 1FG1407 – FD109	4/66
Gearbox size 129	3/77, 4/70, 5/55
• 2-stage – 1FG1111 – Z129	3/77
• 2-stage – 1FG1308 – FZ129	4/70
• 3-stage – 1FG1211 – D129	3/81
• 3-stage – 1FG1406 – FD129	4/74
• 3-stage – 1FG1512 – K129	5/55
Gearbox size 149	5/60
• 3-stage – 1FG1513 – K149	5/60
General.....	2/10
General information.....	7/2
General provisions.....	10/18
General technical specifications.....	1/19
Glossary.....	10/2
Guidelines for selection and ordering.....	1/13

H

Higher permissible radial and axial force.....	2/7
Holding brakes.....	2/11, 8/45
Hollow shafts.....	1/18
Hollow shaft cover.....	2/16

I

Increased chemical resistance.....	2/20, 8/45
Industry Services.....	10/6
Industry Services – portfolio.....	10/7
Information and Download Center.....	10/5
Information and ordering options on the Internet and on DVD.....	10/4
Input speed.....	2/6
Installation altitude.....	2/10
Installation altitude and ambient temperature.....	2/4
Integration.....	1/11
Introduction.....	1/1

L

Losses that occur in gearboxes.....	2/5
Lubricant.....	8/43
Lubrication.....	2/16, 8/42

M

Magnetic oil drain screw.....	2/19
Metal factor examples.....	10/15, 10/16
Metal surcharges.....	10/15
Motor protection.....	7/3
Mounting position.....	8/6
• Angled mounting position.....	8/36
• Servo bevel geared motors.....	8/21
- Foot-mounted design, 2-stage.....	8/21
- Foot-mounted design, 3-stage.....	8/27
- Housing flange and flange-mounted design, 2-stage.....	8/23
- Housing flange and flange-mounted design, 3-stage.....	8/28
- Shaft-mounted design, 2-stage.....	8/25
- Shaft-mounted design, 3-stage.....	8/29
• Servo helical geared motors.....	8/8
- Flange-mounted design or with housing flange, 2-stage, 3-stage.....	8/12
- Foot/flange-mounted design, 2-stage, 3-stage.....	8/10
- Foot-mounted design, 2-stage, 3-stage.....	8/8
• Servo helical worm geared motors.....	8/30
- Foot-mounted design, 2-stage.....	8/34
- Housing flange and flange-mounted design, 2-stage.....	8/32
- Shaft-mounted design, 2-stage.....	8/30
• Servo parallel shaft geared motors.....	8/15
- Flange-mounted design or with housing flange, 2-stage, 3-stage.....	8/17
- Foot-mounted design, 2-stage, 3-stage.....	8/19
- Shaft-mounted design, 2-stage, 3-stage.....	8/15
Motor shaft heights.....	1/18
Mounting types.....	8/5
Mounting types for flange-mounted design (A type).....	8/5
Mounting types for foot/flange-mounted design.....	8/5
Mounting types for foot-mounted design.....	8/5
Mounting types for housing flange design (C type).....	8/5
Mounting types for shaft-mounted design (torque arm).....	8/5

N

Noise emission.....	2/13
Notes on dimensional drawings.....	1/18
Notes on the tables in chapters for selection of servo geared motors.....	1/16

O

Oil drain.....	2/19
Oil expansion unit.....	2/18, 8/44
Oil level control.....	8/44
Oil quantities.....	2/16
Oil sight glass.....	2/19
Online services.....	10/4
Online support.....	10/9
Online support app.....	10/9
Operating range.....	2/4
Options.....	8/1
Ordering data.....	1/13
Orientation.....	1/2
Orientation.....	
• SIMOTICS S-1FG1 servo parallel shaft geared motors.....	4/2
• SIMOTICS S-1FG1 servo bevel geared motors.....	5/2
• SIMOTICS S-1FG1 servo helical geared motors.....	3/2
• SIMOTICS S-1FG1 servo helical worm geared motors.....	6/2
Output shaft bearings, radially reinforced.....	8/41
Overview.....	1/2
Overview of motor types – technical specifications.....	
• Servomotors for a 270 to 330 V DC link voltage.....	7/8
- Motor version CT (Compact).....	7/8
- Motor version HD (High Dynamic).....	7/8
• Servomotors for a 510 to 720 V DC link voltage.....	7/4
- Motor version CT (Compact).....	7/4
- Motor version HD (High Dynamic).....	7/4

P		
Paint finish.....	8/45	
Partners at Siemens.....	10/3	
Percentage method.....	10/15	
Permanent-magnet brake.....	8/45	
Permissible axial force.....	2/7	
Permissible radial force.....	2/7	
Permissible torque for SIMOLOC assembly system.....	2/9	
Plant Data Services.....	10/7	
Position of pressure breather valve, oil drain and oil sight glass.....	8/7	
Position of the connector.....	8/7	
Pressure breather valve.....	2/17, 8/44	
Prices.....	10/18	
Product selection using the interactive catalog CA 01 from Siemens Industry Automation and Drive Technologies.....	10/4	
Protection cover.....	2/16, 8/39	
R		
Radial force conversion for out of center force application point.....	2/8	
Radial force, existing.....	2/6	
Radial force for out of center force application point, conversion.....	2/8	
Radial force, permissible.....	2/7	
Radially reinforced output shaft bearings.....	8/41	
Rating plate.....	8/45	
Rating plate data (type plate).....	2/10	
Recommended bolt grade for helical gearboxes.....	2/6	
Recommended bolt grade for parallel shaft gearboxes and bevel gearboxes.....	2/6	
Reduced-backlash version.....	2/19, 8/41	
Regulations.....	1/19	
Repair Services.....	10/8	
Required torque.....	2/6	
Retrofit and Modernization Services.....	10/8	
Roller bearing greases for gearboxes and motors.....	2/16	
S		
Sealing.....	2/16, 8/42	
Sealing cap.....	2/16	
Sealing system.....	8/42	
Selection and ordering data – structure of tables.....	1/17	
Selection and ordering example.....	1/14	
Service Programs and Agreements.....	10/8	
Servo bevel and servo helical worm geared motors 2-stage.....	2/14	
Servo bevel geared motors – design.....	1/8	
Servo bevel geared motors 3-stage.....	2/14	
Servo geared motor fastening.....	2/6	
Servo geared motor selection		
• Servo bevel geared motors.....	5/3	
• Servo helical geared motors.....	3/3	
• Servo helical worm geared motors.....	6/3	
• Servo parallel shaft geared motors.....	4/3	
Servo geared motors.....	1/2	
Servo geared motors with hollow shaft in shaft-mounted design (torque arm).....	2/14	
Servo helical geared motors – design.....	1/6	
Servo helical worm geared motors – design.....	1/10	
Servo parallel shaft geared motors – design.....	1/7	
Servo parallel shaft geared motors 2-stage/3-stage.....	2/14	
Shaft designs.....	8/2	
• Servo parallel shaft geared motors 2-stage, 3-stage.....	8/2	
• Servo bevel geared motors 2-stage.....	8/3	
• Servo bevel geared motors 3-stage.....	8/3	
• Servo helical geared motors 2-stage, 3-stage.....	8/2	
• Servo helical worm geared motors 2-stage.....	8/4	
Shaft extensions.....	1/18	
Shaft load and bearing service life.....	2/6	
Shaft-mounted design (torque arm).....	8/37	
SIMOLOC assembly system.....	2/15	
SIMOLOC assembly system, permissible torque.....	2/9	
SIMOTICS S-1FG1 servo bevel geared motors.....	5/1	
SIMOTICS S-1FG1 servo helical geared motors.....	3/1	
SIMOTICS S-1FG1 servo helical worm geared motors.....	6/1	
SIMOTICS S-1FG1 servo parallel shaft geared motors.....	4/1	
SINAMICS Drive Control Chart (SINAMICS DCC).....	9/7	
SINAMICS Startdrive – commissioning tool.....	9/8	
SINAMICS Web server.....	9/9	
SinaSave energy efficiency tool.....	9/2	
SIZER for Siemens Drives engineering tool.....	9/4	
SIZER for Siemens Drives.....	2/4, 9/4	
Spare Parts Services.....	10/7	
Special versions.....	8/6	
Spring-operated brake.....	8/45	
Standards.....	1/19, 2/5	
STARTER commissioning tool.....	9/5	
Structure of the Article No.	1/13	
Structure of the metal factor.....	10/15, 10/16	
Structure of the selection and ordering data tables.....	1/17	
Structure of the technical specifications tables.....	1/16	
Support and Consulting Services.....	10/7	
Surcharge calculation.....	10/15, 10/16	
T		
The future of industry on the Internet.....	10/4	
Three-months average price.....	10/16	
Technical definitions for servomotors.....	7/1	
Technical definitions for servomotors – General information.....	7/2	
Technical specifications – overview of motor types.....	7/4	
Technical specifications – structure of tables.....	1/16	
Test certificates.....	8/45	
Training Services.....	10/7	
Type designation of gearboxes.....	1/15	
U		
Unleash potential – with Siemens services.....	10/6	
V		
Values of the metal factor.....	10/17	
Ventilation.....	2/10	
Vent valves.....	1/18	
Vibratory load.....	2/13	
W		
Weight method.....	10/15, 10/16	

Appendix

Indexes

Article number index

1FG11

1FG1102	3/3 ... 3/7
1FG1103	3/12 ... 3/16
1FG1104	3/22 ... 3/27
1FG1105	3/33 ... 3/37
1FG1106	3/43 ... 3/47
1FG1107	3/53 ... 3/56
1FG1108	3/61 ... 3/64
1FG1110	3/69 ... 3/72
1FG1111	3/77 ... 3/80

1FG12

1FG1202	3/8 ... 3/11
1FG1203	3/17 ... 3/21
1FG1204	3/28 ... 3/32
1FG1205	3/38 ... 3/42
1FG1206	3/48 ... 3/52
1FG1207	3/57 ... 3/60
1FG1208	3/65 ... 3/68
1FG1210	3/73 ... 3/76
1FG1211	3/81 ... 3/83

1FG13

1FG1301	4/3 ... 4/8
1FG1302	4/13 ... 4/18
1FG1303	4/24 ... 4/28
1FG1304	4/34 ... 4/38
1FG1305	4/44 ... 4/47
1FG1306	4/52 ... 4/56
1FG1307	4/61 ... 4/65
1FG1308	4/70 ... 4/73

1FG14

1FG1401	4/9 ... 4/12
1FG1402	4/19 ... 4/23
1FG1403	4/29 ... 4/33
1FG1404	4/39 ... 4/43
1FG1405	4/48 ... 4/51
1FG1406	4/57 ... 4/60
1FG1407	4/66 ... 4/69
1FG1408	4/74 ... 4/77

1FG15

1FG1501	5/3 ... 5/8
1FG1502	5/9 ... 5/13
1FG1503	5/14 ... 5/19
1FG1504	5/20 ... 5/25
1FG1505	5/26 ... 5/31
1FG1507	5/32 ... 5/37
1FG1508	5/38 ... 5/43
1FG1510	5/44 ... 5/49
1FG1511	5/50 ... 5/54
1FG1512	5/55 ... 5/59
1FG1513	5/60 ... 5/64

1FG16

1FG1601	6/3 ... 6/7
1FG1602	6/8 ... 6/12
1FG1603	6/13 ... 6/17
1FG1604	6/18 ... 6/22
1FG1605	6/23 ... 6/26

6AU18

6AU1810-1HA24-1XA0	9/7
6AU1810-1HA24-1XE0	9/7

6ES79

6ES7901-1BF00-0XA0	9/6
6ES7901-4BD00-0XA0	9/6

6GK15

6GK1571-1AA00	9/6
---------------------	-----

6SL30

6SL3070-0AA00-0AG0	9/4
6SL3072-0AA00-0AG0	9/6
6SL3077-0AA00-0AB0	9/7

6SW17

6SW1700-0JD00-0AB2	9/11, 9/12
6SW1700-0JD01-0AB2	9/11, 9/12
6SW1700-5JD00-1AC0	9/11
6SW1700-8JD00-0AA0	9/11
6SW1700-8JD00-0AA4	9/11
6SW1700-8JD00-1AA0	9/11
6SW1700-8JD00-1AA4	9/11
6SW1700-8JD00-2AA0	9/11
6SW1700-8JD00-2AA4	9/11
6SW1700-8JD01-0AA0	9/11
6SW1700-8JD01-0AA4	9/11
6SW1700-8JD01-1AA0	9/11
6SW1700-8JD01-1AA4	9/11
6SW1700-8JD01-2AA0	9/11
6SW1700-8JD01-2AA4	9/11

E86060

E86060-D4001-A510-D7-7600	1, 9/3
---------------------------------	--------

Overview¹⁾

Surcharge calculation

To compensate for variations in the price of the raw materials silver, copper, aluminum, lead, gold, dysprosium²⁾ and/or neodym²⁾, surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. A surcharge for the respective raw material is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The surcharges are calculated in accordance with the following criteria:

- Basic official price of the raw material
Basic official price from the day prior to receipt of the order or prior to release order (daily price) for³⁾
 - Silver (sales price, processed)
 - Gold (sales price, processed)
and for⁴⁾
 - Copper (lower DEL notation + 1 %)
 - Aluminum (aluminum in cables)
 - Lead (lead in cables)
- Metal factor of the products
Certain products are displayed with a metal factor. The metal factor determines the official price (for those raw materials concerned) as of which the metal surcharges are applied and the calculation method used (weight or percentage method). An exact explanation is given below.

Structure of the metal factor

The metal factor consists of several digits; the first digit indicates whether the percentage method of calculation refers to the list price or a possible discounted price (customer net price) (L = list price / N = customer net price).

The remaining digits indicate the method of calculation used for the respective raw material. If no surcharge is added for a raw material, a "-" is used.

1st digit	List or customer net price using the percentage method
2nd digit	for silver (AG)
3rd digit	for copper (CU)
4th digit	for aluminum (AL)
5th digit	for lead (PB)
6th digit	for gold (AU)
7th digit	for dysprosium (Dy) ²⁾
8th digit	for neodym (Nd) ²⁾

Weight method

The weight method uses the basic official price, the daily price and the raw material weight. In order to calculate the surcharge, the basic official price must be subtracted from the daily price. The difference is then multiplied by the raw material weight.

The basic official price can be found in the table below using the number (1 to 9) of the respective digit of the metal factor. The raw material weight can be found in the respective product descriptions.

Percentage method

Use of the percentage method is indicated by the letters A-Z at the respective digit of the metal factor.

The surcharge is increased - dependent on the deviation of the daily price compared with the basic official price - using the percentage method in "steps" and consequently offers surcharges that remain constant within the framework of this "step range". A higher percentage rate is charged for each new step. The respective percentage level can be found in the table below.

Metal factor examples

L E A - - - -	Basis for % surcharge: List price Silver Basis 150 €, Step 50 €, 0.5 % Copper Basis 150 €, Step 50 €, 0.1 % No surcharge for aluminum No surcharge for lead No surcharge for gold No surcharge for dysprosium No surcharge for neodym
N - A 6 - - - -	Basis for % surcharge: Customer net price No surcharge for silver Copper Basis 150 €, Step 50 €, 0.1 % Aluminum acc. to weight, basic offic. price 225 € No surcharge for lead No surcharge for gold No surcharge for dysprosium No surcharge for neodym
- - 3 - - - -	No basis necessary No surcharge for silver Copper acc. to weight, basic official price 150 € No surcharge for aluminum No surcharge for lead No surcharge for gold No surcharge for dysprosium No surcharge for neodym

1) Refer to the separate explanation on the next page regarding the raw materials dysprosium and neodym (= rare earths).

2) For a different method of calculation, refer to the separate explanation for these raw materials on the next page.

3) Source: Umicore, Hanau (www.metalsmanagement.umicore.com).

4) Source: Schutzvereinigung DEL-Notiz e.V. (www.del-notiz.org).

Appendix

Metal surcharges

Explanation of the raw material/metal surcharges for dysprosium and neodym (rare earths)

Overview

Surcharge calculation

To compensate for variations in the price of the raw materials silver¹⁾, copper¹⁾, aluminum¹⁾, lead¹⁾, gold¹⁾, dysprosium and/or neodym, surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. The surcharge for dysprosium and neodym is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The surcharge is calculated in accordance with the following criteria:

- Basic official price of the raw material²⁾
Three-month basic average price (see below) in the period before the quarter in which the order was received or the release order took place (= average official price) for
- dysprosium (Dy metal, 99 % min. FOB China; USD/kg)
- neodym (Nd metal, 99 % min. FOB China; USD/kg)
- Metal factor of the products
Certain products are displayed with a metal factor. The metal factor indicates (for those raw materials concerned) the basic official price as of which the surcharges for dysprosium and neodym are calculated using the weight method. An exact explanation of the metal factor is given below.

Three-month average price

The prices of rare earths vary according to the foreign currency, and there is no freely accessible stock exchange listing. This makes it more difficult for all parties involved to monitor changes in price. In order to avoid continuous adjustment of the surcharges, but to still ensure fair, transparent pricing, an average price is calculated over a three-month period using the average monthly foreign exchange rate from USD to EUR (source: European Central Bank). Since not all facts are immediately available at the start of each month, a one-month buffer is allowed before the new average price applies.

Examples of calculation of the average official price:

Period for calculation of the average price:	Period during which the order/release order is effected and the average price applies:
Sep 2012 - Nov 2012	Q1 in 2013 (Jan - Mar)
Dec 2012 - Feb 2013	Q2 in 2013 (Apr - Jun)
Mar 2013 - May 2013	Q3 in 2013 (Jul - Sep)
Jun 2013 - Aug 2013	Q4 in 2013 (Oct - Dec)

Structure of the metal factor

The metal factor consists of several digits; the first digit is not relevant to the calculation of dysprosium and neodym.

The remaining digits indicate the method of calculation used for the respective raw material. If no surcharge is added for a raw material, a "-" is used.

1st digit	List or customer net price using the percentage method
2nd digit	for silver (AG) ¹⁾
3rd digit	for copper (CU) ¹⁾
4th digit	for aluminum (AL) ¹⁾
5th digit	for lead (PB) ¹⁾
6th digit	for gold (AU) ¹⁾
7th digit	for dysprosium (Dy)
8th digit	for neodym (Nd)

Weight method

The weight method uses the basic official price, the average price and the raw material weight. In order to calculate the surcharge, the basic official price must be subtracted from the average price. The difference is then multiplied by the raw material weight.

The basic official price can be found in the table below using the number (1 to 9) of the respective digit of the metal factor. Your Sales contact can inform you of the raw material weight.

Metal factor examples

-----71	
↑	No basis necessary
↑	No surcharge for silver
↑	No surcharge for copper
↑	No surcharge for aluminum
↑	No surcharge for lead
↑	No surcharge for gold
↑	Dysprosium acc. to weight, basic official price 300 €
↑	Neodym acc. to weight, basic official price 50 €

Appendix

Metal surcharges

Values of the metal factor

Overview

Percentage method	Basic official price in €	Step range in €	% surcharge 1st step	% surcharge 2nd step	% surcharge 3rd step	% surcharge 4th step	% surcharge per additional step
			Price in €	Price in €	Price in €	Price in €	
			150.01 - 200.00	200.01 - 250.00	250.01 - 300.00	300.01 - 350.00	
A	150	50	0.1	0.2	0.3	0.4	0.1
B	150	50	0.2	0.4	0.6	0.8	0.2
C	150	50	0.3	0.6	0.9	1.2	0.3
D	150	50	0.4	0.8	1.2	1.6	0.4
E	150	50	0.5	1.0	1.5	2.0	0.5
F	150	50	0.6	1.2	1.8	2.4	0.6
G	150	50	1.0	2.0	3.0	4.0	1.0
H	150	50	1.2	2.4	3.6	4.8	1.2
I	150	50	1.6	3.2	4.8	6.4	1.6
J	150	50	1.8	3.6	5.4	7.2	1.8
			175.01 - 225.00	225.01 - 275.00	275.01 - 325.00	325.01 - 375.00	
O	175	50	0.1	0.2	0.3	0.4	0.1
P	175	50	0.2	0.4	0.6	0.8	0.2
R	175	50	0.5	1.0	1.5	2.0	0.5
			225.01 - 275.00	275.01 - 325.00	325.01 - 375.00	375.01 - 425.00	
S	225	50	0.2	0.4	0.6	0.8	0.2
U	225	50	1.0	2.0	3.0	4.0	1.0
V	225	50	1.0	1.5	2.0	3.0	1.0
W	225	50	1.2	2.5	3.5	4.5	1.0
			150.01 - 175.00	175.01 - 200.00	200.01 - 225.00	225.01 - 250.00	
Y	150	25	0.3	0.6	0.9	1.2	0.3
			400.01 - 425.00	425.01 - 450.00	450.01 - 475.00	475.01 - 500.00	
Z	400	25	0.1	0.2	0.3	0.4	0.1
Price basis (1st digit)							
L	Calculation based on the list price						
N	Calculation based on the customer net price (discounted list price)						
Weight method	Basic official price in €						
1	50	Calculation based on raw material weight					
2	100						
3	150						
4	175						
5	200						
6	225						
7	300						
8	400						
9	555						
Miscellaneous							
–	No metal surcharge						

Appendix

Conditions of sale and delivery

1. General Provisions

By using this catalog you can acquire hardware and software products described therein from Siemens AG subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as "T&C"). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

1.1 For customers with a seat or registered office in Germany

For customers with a seat or registered office in Germany, the following applies subordinate to the T&C:

- the "General Terms of Payment"¹⁾ and,
- for software products, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or Registered Office in Germany"¹⁾ and,
- for other supplies and services, the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"¹⁾.

1.2 For customers with a seat or registered office outside Germany

For customers with a seat or registered office outside Germany, the following applies subordinate to the T&C:

- the "General Terms of Payment"¹⁾ and,
- for software products, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or Registered Office outside of Germany"¹⁾ and
- for other supplies and/or services, the "General Conditions for Supplies of Siemens Industry for Customers with a Seat or Registered Office outside of Germany"¹⁾.

2. Prices

The prices are in € (Euro) ex point of delivery, exclusive of packaging.

The sales tax (value added tax) is not included in the prices. It shall be charged separately at the respective rate according to the applicable statutory legal regulations.

Prices are subject to change without prior notice. We will charge the prices valid at the time of delivery.

To compensate for variations in the price of raw materials (e.g. silver, copper, aluminum, lead, gold, dysprosium and neodym), surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. A surcharge for the respective raw material is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The metal factor of a product indicates the basic official price (for those raw materials concerned) as of which the surcharges on the price of the product are applied, and with what method of calculation.

You will find a detailed explanation of the metal factor on the page headed "Metal surcharges".

To calculate the surcharge (except in the cases of dysprosium and neodym), the official price from the day prior to that on which the order was received or the release order was effected is used.

To calculate the surcharge applicable to dysprosium and neodym ("rare earths"), the corresponding three-month basic average price in the quarter prior to that in which the order was received or the release order was effected is used with a one-month buffer (details on the calculation can be found in the explanation of the metal factor).

3. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog - especially with regard to data, dimensions and weights given - these are subject to change without prior notice.

4. Export regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export of goods listed in this catalog may be subject to licensing requirements. We will indicate in the delivery details whether licenses are required under German, European and US export lists. Goods labeled with "AL" not equal to "N" are subject to European or German export authorization when being exported out of the EU. Goods labeled with "ECCN" not equal to "N" are subject to US re-export authorization.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels "AL" and "ECCN" indicated on order confirmations, delivery notes and invoices are authoritative.

Even without a label, or with label "AL:N" or "ECCN:N", authorization may be required i.a. due to the final disposition and intended use of goods.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you must comply with all applicable national and international (re-)export control regulations.

If required for the purpose of conducting export control checks, you (upon request by us) shall promptly provide us with all information pertaining to the particular end customer, final disposition and intended use of goods delivered by us respectively works and services provided by us, as well as to any export control restrictions existing in this relation.

The products listed in this catalog may be subject to European/German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities.

Errors excepted and subject to change without prior notice.

1) The text of the Terms and Conditions of Siemens AG can be downloaded at www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf